

# Elines

## E32 · E66

Thermal printers



Thermal



260  
MM/SEC  
Speed  
(Optional)



80  
MM  
Paper width



Triple interface  
(Optional)



ABS Material



Wifi  
(Optional)



### DESCRIPTION

Elines thermal printer, available in various models, offers the quality and versatility you need. It is a compact printer designed with ABS material, making it very lightweight. It features easy paper loading and the option to hang or attach it to a base or wall using the anchor on the bottom.

This printer comes in multiple models based on ports (dual or triple interface) and available notification types. It can have both auditory and visual notifications, making it ideal for noisy work environments such as kitchens, hotels, or retail stores.

### INTERFACE

E32: Double interface  
E66: Triple interface + Wifi (Option)

### WARNING TYPES

E32: Sound  
E66: Sound + Light warning

### GUARANTEE

2 years guarantee







HOSPITALITY



PUBS



SUPERMARKETS



KITCHEN

## TECHNICAL SPECIFICATION

- **Method:** Thermal direct
- **Speed:** 260mm/s
- **Resolution:** 640dots/line
- **Paper width:** 80mm (Max) (or 72mm)
- **Separator (optional):** 48mm / 52mm / 56mm / 64mm / 68mm / 76mm / 80mm
- **Input buffer:** 256kbytes
- **NV Flash Memory:** 256kbytes

## PAPER

- **Typw of paper:** Thermal ticket
- **Paper width:** 48mm / 52mm / 56mm / 64mm / 68mm / 76mm / 80mm
- **Paper thickness:** 0.06~0.08mm
- **Roll diameter:** Max. Ø 83 mm
- **Paper load:** Easy load of paper
- **Paper cutter:** Manual or automatic

## SOURCES

- **Source A:** 12x24
- **Source B:** 9x17
- **Source chosen for user:** Support

## PHYSICAL CHARACTERISTICS

- **Working temperature:** 0°C~45°C, 10%~80%RH
- **Storage temperature:** -10°C-60°C, 10%~90%RH
- **Dimensions:** 191(D)x146(W)x129(H)mm
- **Net weight:** 1.94kg **Gross weight:** 2.14kg

## BARCODE

- **1D:** UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODE39 / ITF / CODABAR / CODE93 / CODE128
- **2D:** Code QR

## RELIABILITY

- **Print head:** 150KM
- **Cutter:** 1.5 millions

## DETECTION

- **Sensors:** Paper out, open cover, cutter jam, paper jam and mark detection (Optional).


## POWER SUPPLY

- **Power Input:** AC 100V-240V 50/60HZ
- **Output:** DC 24V/2.5A

## OTHER CHARACTERISTICS


- **Emulator:** ESC/POS
- **Driver:** Windows XP / Vista / Win7 / Win8 / Win10 / Win 2000 / Win CE / OPOS / JPOS
- **SDK:** Android, IOS
- **Accessories:** USB wire, power adaptador, power code paper roll, CD, manual, paper separator (optional)
- **Dimension:** 26X21X17cm (LXWXH) - 1 unit/box
- **Package dimension:** 64X28X36cm (LXWXH) - 6 units/box

### ELINES E32

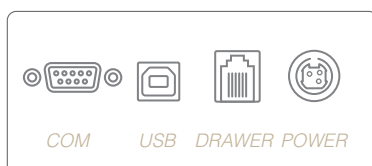

ACOUSTIC WARNING

### ELINES E66

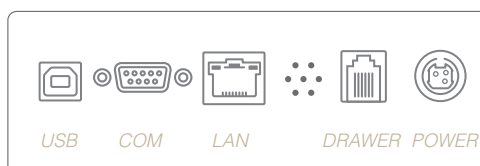

OPTIONAL  
ACOUSTIC WARNING  
LIGHT WARNING