



### Características


- Kiosko Display FHD de 21.5" con pantalla táctil PCAP
- Procesadores Intel core, Pentium Celeron
- SO Windows y Android
- Diseño modular para montaje sin esfuerzo
- Acceso rápido a componentes para un fácil mantenimiento
- Instalacion flexible, en mostrador, pared o sobremesa.
- Compacto, fino, elegante
- Personalizable según exigencias individuales de negocio

### Especificaciones

	Windows	Android	
System	<b>Processors</b>	Intel® Core™ i5-7200U (3M Cache, 2.50/3.10 GHz(Turbo), 2 Cores) Intel® Pentium® 4415U (2M Cache, 2.30 GHz, 2 Cores) - [Project Only] Intel® Celeron® 3965U (2M Cache, 2.20 GHz, 2 Cores) Intel® Celeron® J1900 (2M Cache, 2.0/2.42 GHz (Burst), 4 Cores), Fanless - [Project Only]	Cortex™- A17 Quad-Core (Up to 1.8GHz)
	<b>Chipset</b>	7200U/4415U/3965U Intel® Kaby Lake J1900 Intel® Bay Trail	
	<b>Memory</b>	7200U/4415U/3965U 4GB Standard, DDR4 2133 MT/s, Socket 1x SODIMM (7200U Max. 32GB) J1900 4GB Standard, DDR3L 1600 MT/s, Socket 1 x SODIMM	2GB Standard, DDR3L 1600 MT/s,
	<b>Storage</b>	7200U/4415U/3965U SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI J1900 SATA 2 (3Gb/s) 2.5 inch SSD 64GB, Support AHCI (Celeron)	eMMC 16 GB
	<b>Operating Systems</b>	7200U/4415U/3965U Windows 10 IoT Enterprise J1900 Windows 7, Windows 8.1, Windows 10 IoT Enterprise, POS Ready 7	Andoird 7.X (Nougat)
	<b>Audio</b>	Realtek ALC662-VD, Speaker 2 x 1W	Realtek ALC5640, Speaker 2 x 1W
Display	<b>Type</b>	21.5" TFT LCD, LED Backlight	
	<b>Resolution</b>	1080 x 1920	
	<b>Brightness</b>	300 cd/m <sup>2</sup> (typ.)	
	<b>Touchscreen</b>	Projected Capacitive Touch	
	<b>Response</b>	12 ms	
	<b>Contrast Ratio</b>	3000 (typ.)	
Interface	<b>USB</b>	7200U/4415U/3965U 2 x USB 3.0 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45 J1900 2 x USB 2.0 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45	2 x USB 2.0 3 (Reserved for MSR, SCR/ Touch Controller/Camera), RJ-45
	<b>Serial</b>	COM2~3 RJ-45 , Full Signal	
	<b>LAN</b>	1 x Gigabit Ethernet, RJ-45	
	<b>Power DC-IN</b>	1 x (3 Pin Connector)	
<b>Power</b>	<b>Power Supply</b>	Adaptor 24V, 6.35A	
Pedestal	<b>Material</b>	Galvanized Steel Plate	
	<b>Material Thickness</b>	1.2T	
	<b>Component Access</b>	Security Locks with 7-Pin Tumbler / Rear Security Door	
Physical & Environmental	<b>Operating Temperature</b>	0 °C ~ 60 °C at 10% to 90% Humidity	
	<b>Storage Temperature</b>	-20 °C ~ 80 °C at 10% to 90% Humidity	
	<b>Dimensions (W x H x D)</b>	System : 36 x 76 x 12 cm, 14.1 x 30 x 4.7 in Pedestal : 36 x 89 x 12 cm, 16.9 x 35 x 4.7 in Baseplate : 54 x 1 x 42cm, 21.2 x 0.39 x 16.5 in	
	<b>Packing Dimensions (W x H x D)</b>	System : 50 x 88 x 24 cm, 19.7 x 34.6 x 9.4 in Pedestal : 50 x 100 x 24 cm, 19.7 x 39.3 x 9.4 in Baseplate : 57 x 5 x 45cm, 22.4 x 1.97 x 17.7 in	
	<b>Net Weight</b>	System : 11.8Kg Pedestal : 10.0kg Baseplate : 12.5Kg	
	<b>Packing Weight</b>	System : 15.7Kg Pedestal : 13.8Kg Baseplate : 13.5Kg	
	<b>Certification</b>	CE, FCC, KC	
	<b>Color</b>	High Gloss White, Custom Colors Available - [Project Only]	

Options	<b>Storage</b>	2.5 inch SSD 128GB, 256GB, HDD 500GB, 1TB	
	<b>Built-in Printer</b>	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)	
	<b>Barcode Scanner</b>	1D, 2D Barcode	
	<b>Camera</b>	2M USB Interface (Internal) (Factory Option)	
	<b>Magnetic Stripe Reader</b>	Comply with ISO 7811, Support 1 & 2 & 3 Track	
	<b>Smart Card Reader</b>	EMV Level 1, 2	
	<b>NFC Reader</b>	MIFARE, FeliCa, ISO/IEC 14443A, ISO/IEC 14443B, ISO/IEC 15693	
	<b>Wall Mount Kit</b>	VESA-Compatible, 100 x 100 mm, 200 x 200 mm	
	<b>Speaker</b>	2 x 5W (Stereo) (Factory Option)	
	<b>WiFi</b>	Mini PCIe for Wireless LAN (Core/Pentium) USB Dongle (Celeron)	On Board
<b>Custom Options</b>	Customer-Assigned EMV Terminal Bracket, Bill/Coin Acceptor, Document Reader (Passports/IDs), Ticket/Document Printer, UPS (Uninterruptible Power Supply)		

\* Specifications may change without prior notice.

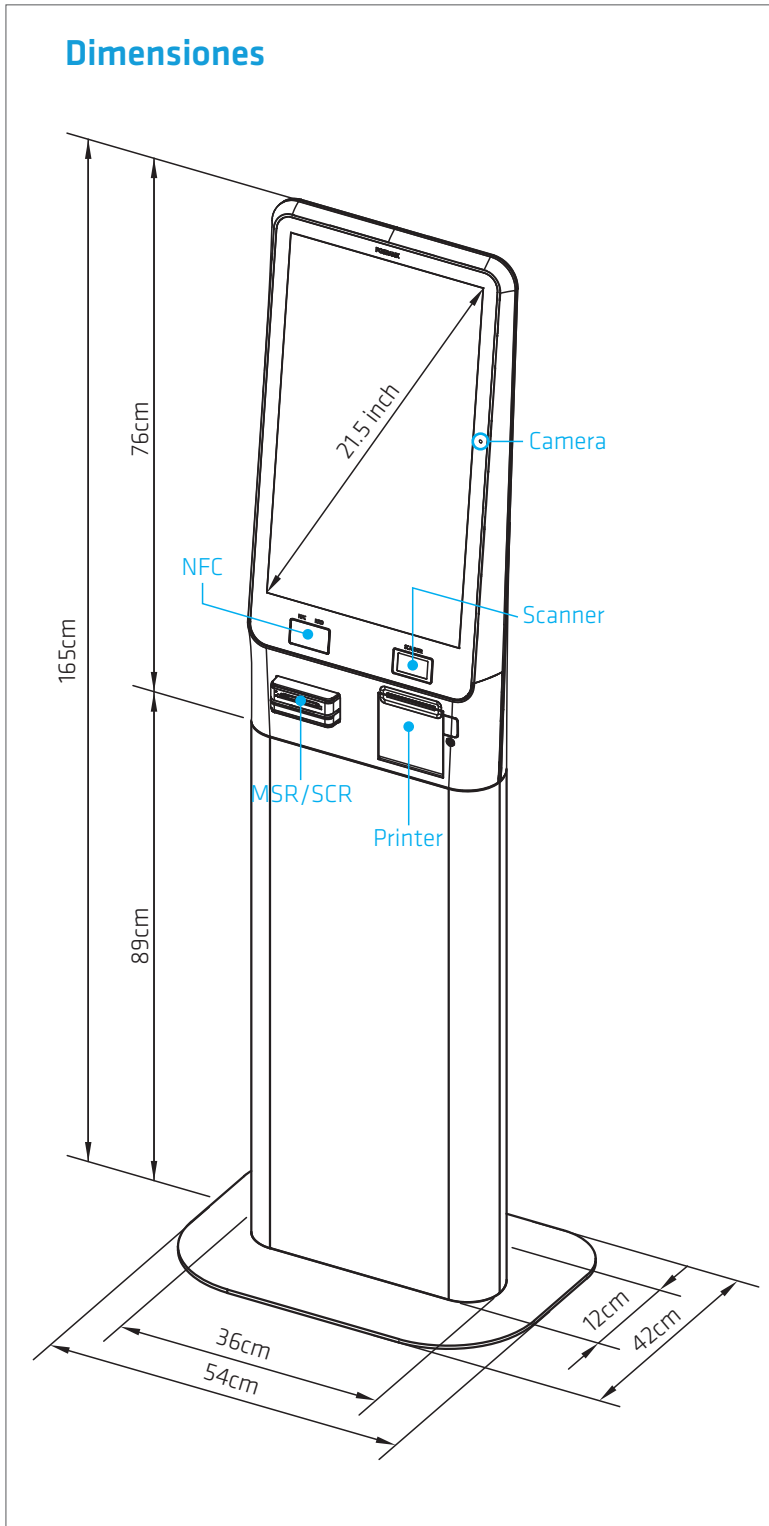

## Aplicaciones

- Kiosko self service en Retail y Hoteles
- Pedidos de clientes con opciones para pago
- Expendedor de tickets en Teatros y Museos
- Escaneo e impresión de documentos/tickets

## Opciones




### Payment

- MSR/SCR, Bill/Coin Acceptor
- Customer-Assigned EMV Terminal Bracket



### Built-in Printer

- 3", Speed up to 250 mm/s, Auto Cutter

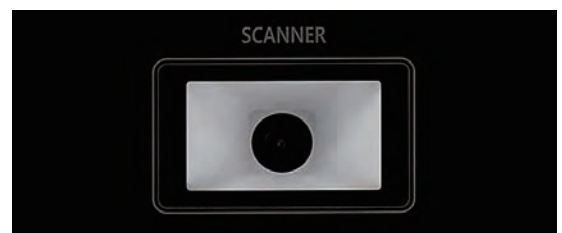

### Barcode Scanner

- 1D, 2D Barcode



### NFC

- MIFARE, FeliCa, ISO/IEC 14443A
- ISO/IEC 14443B, ISO/IEC 15693

**POSBANK®**

Copyright © 2020 POSBANK Co., Ltd.

POSBANK and the POSBANK logo are trademarks of POSBANK in the United States and other countries. All trademarks are the property of their respective owners. Intel, Celeron, Core are registered trademarks of Intel Corporation in the United States and other countries. Microsoft, Windows 7, Windows 8.1, Windows 10 IoT Enterprise and POS Ready 7 are registered trademarks of Microsoft Corporation in the United States and other countries. POSBANK shall not be liable for technical or editorial errors or omission contained herein. The information in this publication is informational purposes only and may be altered or amended by POSBANK. All statements regarding POSBANK's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.