




Características

- Kiosko Display FHD de 27" con pantalla táctil PCAP
- Procesadores Intel core, Pentium Celeron
- SO Windows y Android
- Diseño modular para montaje sin esfuerzo
- Acceso rápido a componentes para un fácil mantenimiento
- Instalacion flexible, en mostrador, pared o sobremesa.
- Compacto, fino, elegante
- Personalizable según exigencias individuales de negocio

Especificaciones

	Windows	Android	
System	Processors	Intel Core i3-1115G4 (6M Cache, up to 4.10 GHz, 2 core)	Cortex™- A17 Quad-Core (Up to 1.8GHz)
	Chipset	Intel Celeron J6412 (1.5M Cache, up to 2.60GHz, 4 Core)	
	Memory	i-3-1115G4 8GB Standard, DDR4 3200 MT/s, Socket 1x SODIMM (max. 32GB) J6412 4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM (max. 32GB)	2GB Standard, DDR3L 1600 MT/s,
	Storage	i-3 1115G4 -J6412 SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI	eMMC 16 GB
	Operating Systems	Windows 10 IoT Enterprise, POS Ready 7	Andoird 7X (Nougat)
	Audio	Realtek ALC662-VD, Speaker 2 x 1W	Realtek ALC5640, Speaker 2 x 1W
	Display	Type	27" TFT LCD, LED Backlight
Resolution		1080 x 1920	
Brightness		300 cd/m² (typ.)	
Touchscreen		Projective Capacitive Touch	
Response		12 ms	
Contrast Ratio		3000 (typ.)	
Interface	USB	2 x USB 3.0 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45	2 x USB 2.0 3 (Reserved for MSR, SCR/ Touch Controller/Camera), RJ-45
	Serial	COM2~3 RJ-45 , Full Signal	
	LAN	1x Gigabit Ethernet, RJ-45	
	Power DC-IN	1x (3 Pin Connector)	
Power	Power Supply	Adaptor 24V, 6A	
Pedestal	Material	Galvanized Steel Plate	
	Material Thickness	1.2T	
	Component Access	Security Locks with 7-Pin Tumbler / Rear Security Door	
Physical & Environmental	Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity	
	Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity	
	Dimensions (W x H x D)	42.6x 178 x 13.5 cm, 16.7 x 70.0 x 5.3 in	
	Packing Dimensions (W x H x D)	100 x 57 x 26 cm, 39.3 x 22.4 x 10.2 in (System) 100 x 57 x 26 cm, 39.3 x 22.4 x 10.2 in (Pedestal, Baseplate)	
	Net Weight	36kg, 79.3lb (System, Pedestal, Baseplate)	
	Packing Weight	43kg, 94.7lb (System, Pedestal, Baseplate)	
	Certification	CE, FCC, KC	
	Color	High Gloss White, Custom Colors Available - Project Only]	
Options	Storage	2.5 inch SSD 128GB, 256GB, HDD 500GB, 1TB	
	Built-in Printer	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)	
	Barcode Scanner	1D, 2D Barcode	
	Camera	2M USB Interface (Internal) (Factory Option)	
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track	
	Smart Card Reader	EMV Level 1, 2	
	NFC Reader	MIFARE, FeliCa, ISO/IEC 14443A, ISO/IEC 14443B, ISO/IEC 15693	
	Wall Mount Kit	VESA-Compatible, 100 x 100 mm, 200 x 200 mm	
	Speaker	2 x 5W (Stereo) (Factory Option)	
	WiFi	Mini PCIe for Wireless LAN (Core/Pentium) USB Dongle (Celeron)	On Board
Custom Options	Customer-Assigned EMV Terminal Bracket, Bill/Coin Acceptor, Document Reader (Passports/IDs), Ticket/Document Printer, UPS (Uninterruptible Power Supply)		


Dimensiones

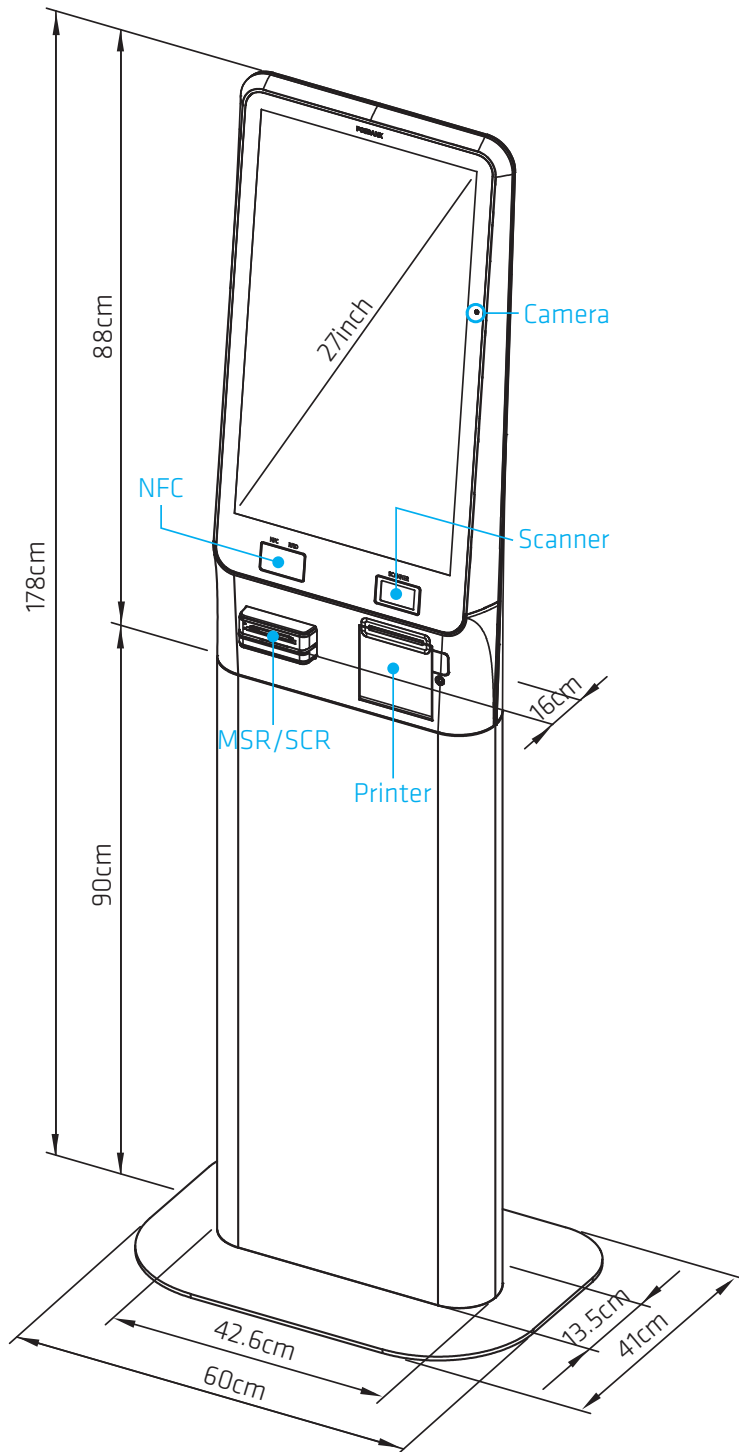

Aplicaciones

- Kiosko self service en Retail y Hoteles
- Pedidos de clientes con opciones para pago
- Expendedor de tickets en Teatros y Museos
- Escaneo e impresión de documentos/tickets

Opciones

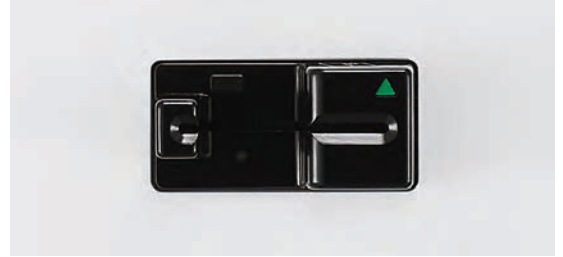

Payment

- MSR/SCR, Bill/Coin Acceptor
- Customer-Assigned EMV Terminal Bracket



Built-in Printer

- 3", Speed up to 250 mm/s, Auto Cutter



Barcode Scanner

- 1D, 2D Barcode



NFC

- MIFARE, FeliCa, ISO/IEC 14443A
- ISO/IEC 14443B, ISO/IEC 15693

POSBANK®

Copyright © 2019 POSBANK Co., Ltd.

POSBANK and the POSBANK logo are trademarks of POSBANK in the United States and other countries. All trademarks are the property of their respective owners. Intel, Celeron, Core are registered trademarks of Intel Corporation in the United States and other countries. Microsoft, Windows 7, Windows 8.1, Windows 10 IoT Enterprise and POS Ready 7 are registered trademarks of Microsoft Corporation in the United States and other countries. POSBANK shall not be liable for technical or editorial errors or omission contained herein. The information in this publication is informational purposes only and may be altered or amended by POSBANK. All statements regarding POSBANK's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.