

# POS ZINKPOS Z150

Display: Capacitive 15"

#### Processor

Intel® J6412 - 2.6Ghz

#### Motherboard

Intel® Elkhart Lake SoC / AMI

#### Ports

USB, COM, LAN

#### Operative System

Windows 10 / 11



The Zinkpos Z150 touch POS stands out for its smart and **modern design**, aimed at enhancing brand value in any commercial environment. Equipped with a **15-inch** touchscreen, this device ensures durability and resistance, thanks to its solid metal base. Additionally, the Z150 features high-performance speakers, providing a superior and efficient user experience for point-of-sale operations.

It has a high-quality **ABS** casing and an internal aluminum structure to optimize heat dissipation, allowing for the construction of a very quiet and lightweight **fanless POS**.

#### TECHNICAL SPECIFICATION

Display: 15" LED True Flat Screen

Resolution: 1024\*768


CPU: Intel® Celeron Quad-Core J6412

Ports: USB, COM, LAN, Audio

Memory: DDR4 4GB

Disc: 128GB SATA SLIDING DESIGN

Ethernet: 10M/100M/1000M

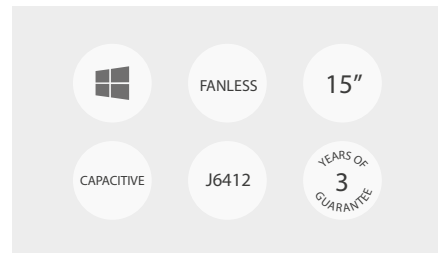

#### ACCESORIES AND OPTIONS

Card reader: MSR 1 & 2 & 3  
Customer display: 9,7" or 15"  
VFD: 2x20 lines  
iButton Dallas

#### GUARANTEE

3 years

zinkpos

# TECHNICAL SPECIFICATIONS

DIMENSIONS	36.2cm*23.7cm*35.7cm
PACKAGING	445*330*450mm
WEIGHT	4.5kg
OPERATIVE SYSTEM	Windows 10 / 11
GUARANTEE	3 years



## SPECIFICATION

Processor	J6412 Quad Core 2.0GHz / 2.6GHz
Chipset	Intel® Elkhart Lake SoC / AMI
RAM	4GB
Graphics	Intel® UHD Graphics

## POTS I/O

USB	6×USB (4xUSB 3.1 y 2xUSB 2.0)
COM	1xUSB (RJ11)
LAN	1×10/100/1000Mbps Ethernet
DP	1xDisplayPort
SERIAL	5xCOM
AUDIO	1
SPEAKERS	1x3W

## TOUCH PANEL

Display Technology	15" WLED Backlight Flat Capacitive (10 points)
Bright	350cd/m <sup>2</sup>
Resolution	1024*768
Adjustable angle	83 to 152 grades

## WORK ENVIRONMENT

Working temperature	0°C to 50°C
Stored temperature	-20°C to 60°C
Humidity	10% to 90%

## MEMORY

SSD	128GB SATA SLIDING DESIGN
RAM	DDR4, 4GB

## CERTIFICATE

EMC and security	CE, FCC, KC, CB
------------------	-----------------

## OPTIONS

MSR	Track 1&2&3
Second display	9.7" or 15"
VFD	VFD (2×20)
Dallas	iButton reader

## POWER SUPPLY

Power supply	DC 12V/5A (AC 100V a 240V, 60W)
LED	LED indicators